
932897-600


Outside turning double window/door with WML:
Active door on left side
Active operable part size: 1129x2657mm
Passive operable part size: 1128x2657mm
-6x Stainless steel flat-end weld-on hinges 120mm (WOH-2)
-MHB Window Multipoint Lock (WML)
  Handle position from bottom of sash: 1070
-MHB Stainless Steel T-shaped handle on oval WML rose (WMH.01 - MOV)
  Handle color: Handle and rose in color frame
-MHB semi-espagnolet top and flush bolt 140mm bottom
-No magnetic contact
-Hinge Bolts (burglary resistance)
-No window stay(s)


Outside turning double window/door with WML:
Active door on right side
Active operable part size: 1129x2657mm
Passive operable part size: 1128x2657mm
-6x Stainless steel flat-end weld-on hinges 120mm (WOH-2)
-MHB Window Multipoint Lock (WML)
  Handle position from bottom of sash: 1070
-MHB Stainless Steel T-shaped handle on oval WML rose (WMH.01 - MOV)
  Handle color: Handle and rose in color frame
-MHB semi-espagnolet top and flush bolt 140mm bottom
-No magnetic contact
-Hinge Bolts (burglary resistance)
-No window stay(s)

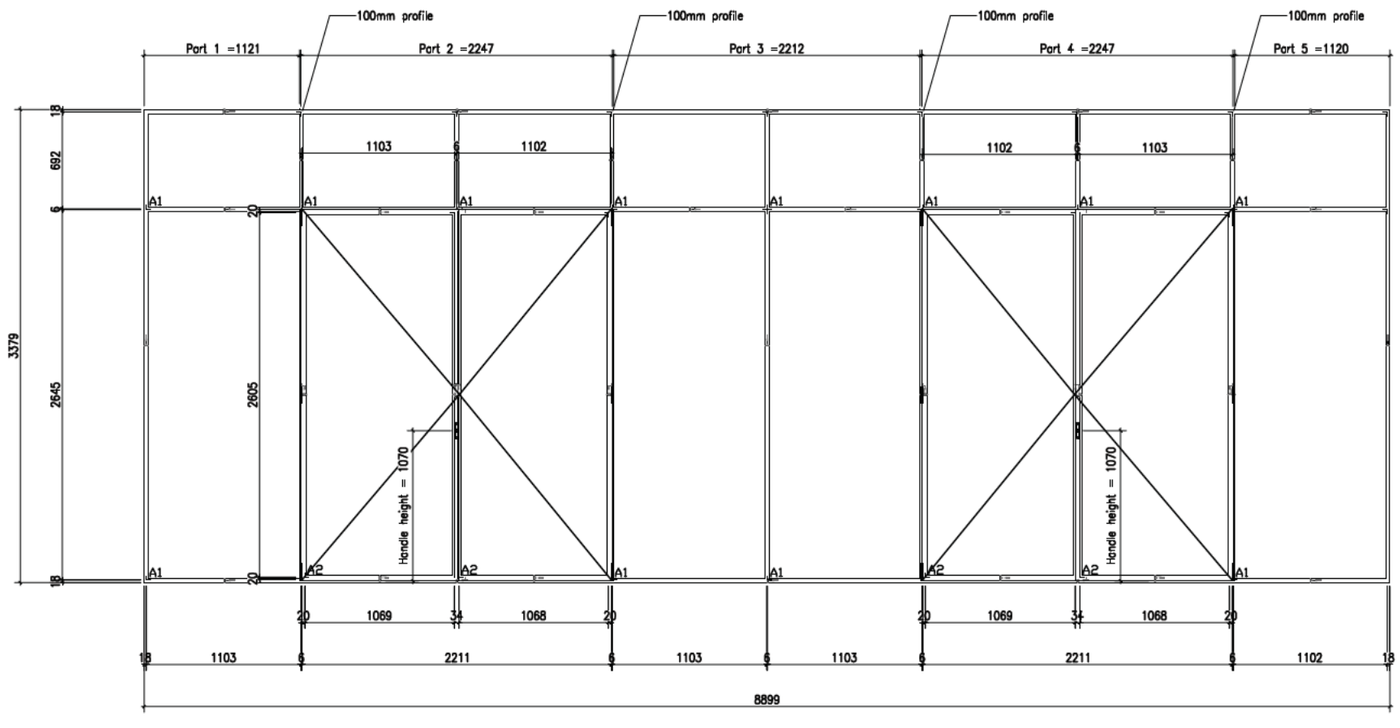

Project nr: Y19-02993	Date: 2019-07-18	
Project name: 1889 - Amsterdam, Frans van Mierisstraat 131		
Unit code: 70010		
Quantity: 1	Description: Merk A	

932897-600

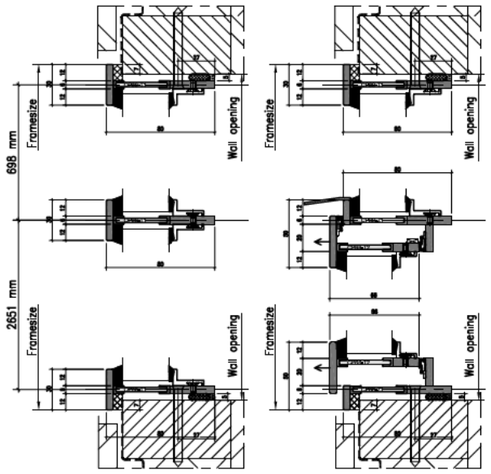

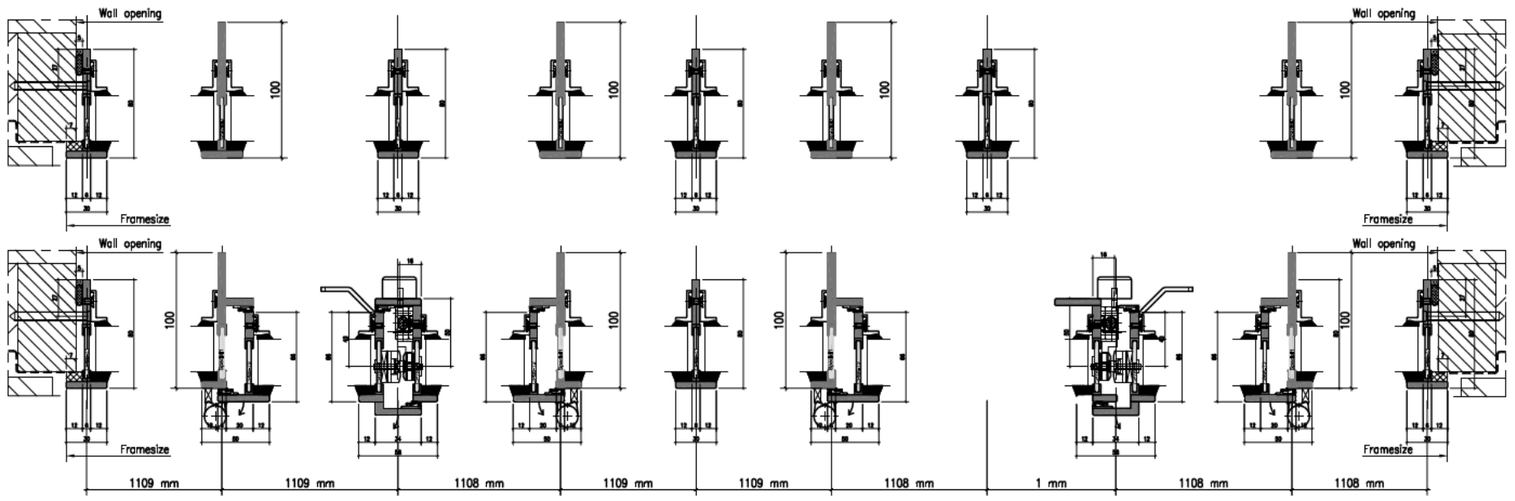

F:\acad\Basta NIEUW\template\MHB logo ENG.png	Project nr: Y19-02993	Date: 2019-07-18
	Project name: 1889 - Amsterdam, Frans van Mierisstraat	
	Unit code: 70010	
M.H.B. b.v. Postbus 6 6674 ZG Onderstalstraat 3 6674 ME Hervelt tel:+31(0)486-451951 fax: 452022 www.mhb.nl	Quantity: 1	Description: Merk A


ISO_A2_(594.00_x_420.00_MM)


Project nr: Y19-02993 **Date:** 2019-7-18

Description: 1889 - Amsterdam, Frans van Mierisstraat 131 **Profile system:** SL30-ISO inside glazing 80 mm

City: Amsterdam **Address:** Frans van Mierisstraat 131 **Quote remark:** 1889 - Definitief (WoW2.1)

Note: drawing is schematic diagram
For actual dimensions see table

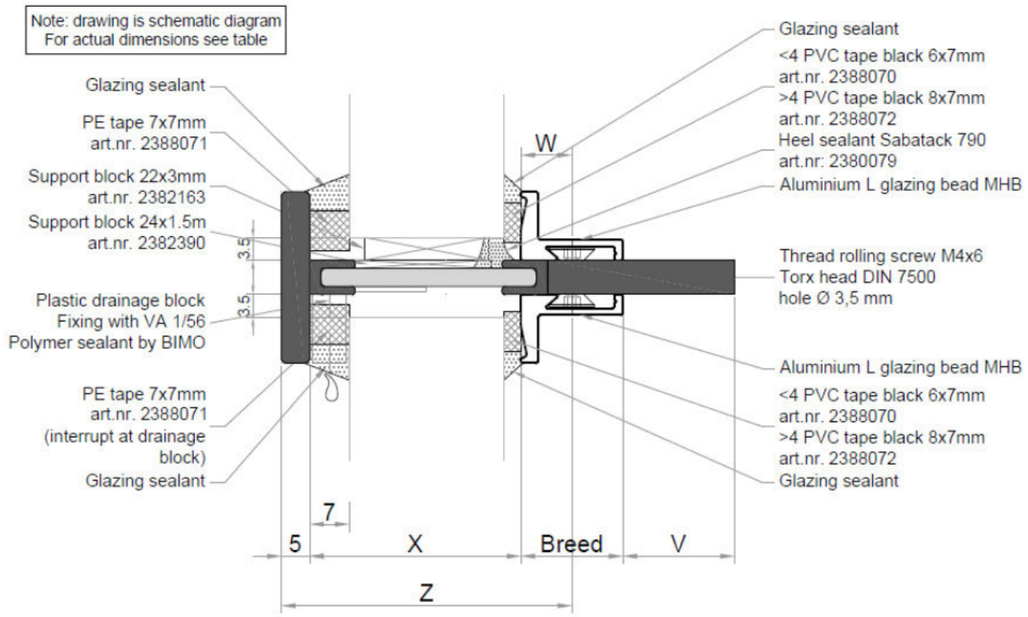

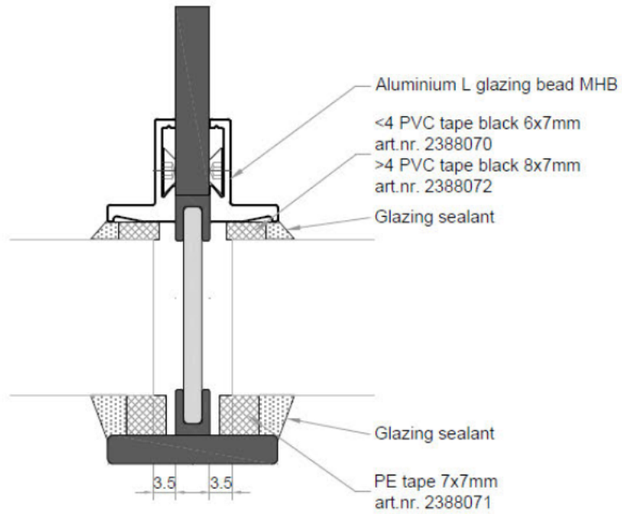

Comp. Code	Profile series	Structure	Weight kg/m2	delivered by mhb	Description compartment filling	Glassthickness	Glazing stop	Width	X	V	Z	Flange side	Glazing stop side	Spacer color
A1	SL30isoIG	5301087	0	No	Not for MHB	34	Alu-Lshape/1397023	23	44	8	64	Cell tape:7mm (2388071)	Cell tape:3mm (2388070)	Not for MHB
A2	SL30isoIG	5301085	0	No	Not for MHB	34	Alu-Lshape/1397015	15	44	2	56	Cell tape:7mm (2388071)	Cell tape:3mm (2388070)	Not for MHB

AKKOORD
[redacted]
PERFECT VIEW
BV
DD 23-08-2019

Surface treatment :

Class C3 (medium corrosive environment)Applicable in urban and industrial areas with moderate pollution. Production halls with high humidity and some pollution: laundries, breweries, food processing industry

Grit blasting SA 2.5, by 2-layer powder coating
The first layer is a Zerozinc primer
The second layer is a Super Durable top coating (C4H)

Ref. supplier: SD130C-7702120
Type: Fine texture
Ref. color: RAL 7021
Color name: Black Grey
Gloss %: 8-12

WO: 932897

DO:600