Report for D-Sheet Piling 19.3

Design of Diaphragm and Sheet Pile Walls
Developed by Deltares

Date of report:	6/2/2020
Time of report:	5:08:06 PM
Report with version:	19.3.2.28346
Date of calculation:	6/2/2020
Time of calculation:	5:07:46 PM
Calculated with version:	19.3.2.28346
File name:	Iba boom hulpdamwand

Verification according to National Annex of Eurocode 7 in the Netherlands (NEN 9997-1:2016)

1 Table of Contents

1 Table of Contents 2
2 Summary 3
2.1 Overview per Stage and Test 3
2.2 Overall Stability per Stage 3
2.3 Warnings 3
2.4 CUR Verification Steps 4
3 Input Data for all Stages 5
3.1 General Input Data 5
3.2 Sheet Piling Properties 5
3.2.1 General Properties 5
3.2.2 Stiffness EI (elastic behaviour) 5
3.2.3 Maximum Allowable Moments 5
3.2.4 Properties for Vertical Balance 5
3.3 Calculation Options 5

2 Summary

2.1 Overview per Stage and Test

Stage nr.	Verification type	Displace-ment [mm]	Moment [kNm]	Shear force [kN]	Mob. perc. moment [%]	Mob. perc. resistance [%]	Vertical balance
1	EC7(NL)-Step 6.3		-13,57	-4,66	**0,0**	16,2	Upwards
1	EC7(NL)-Step 6.4		-10,30	-4,64	**0,0**	16,2	Upwards
1	EC7(NL)-Step 6.5	0,0	0,00	0,00	**0,0**	11,0	Sufficient
1	EC7(NL)-Step 6.5 * 1,200		0,00	0,00			
2	EC7(NL)-Step 6.3		16,53	6,38	**0,0**	18,3	Upwards
2	EC7(NL)-Step 6.4		12,37	6,12	**0,0**	18,3	Upwards
2	EC7(NL)-Step 6.5	-2,4	5,21	4,08	**0,0**	12,8	Upwards
2	EC7(NL)-Step 6.5 * 1,200		6,26	4,89			
3	EC7(NL)-Step 6.3		**538,37**	-120,96	**0,0**	**29,7**	Upwards
3	EC7(NL)-Step 6.4		535,84	**-132,77**	**0,0**	29,4	Upwards
3	EC7(NL)-Step 6.5	**-136,2**	344,55	-74,91	**0,0**	17,9	Upwards
3	EC7(NL)-Step 6.5 * 1,200		413,46	-89,89			
Max		**-136,2**	**538,37**	**-132,77**	**0,0**	**29,7**	Sufficient


2.2 Overall Stability per Stage

Stage name	Stability factor [-]
Initieel	10000,00
Ophoging	13,69
Stempelkracht	9,90

2.3 Warnings

* Vertical balance: The resultant vertical friction force is directed upward in stage 1, 2 & 3
because the friction force on the passive side exceeds that on the active side.
This might be prevented by reducing the friction angle Delta on the passive side.

2.4 CUR Verification Steps

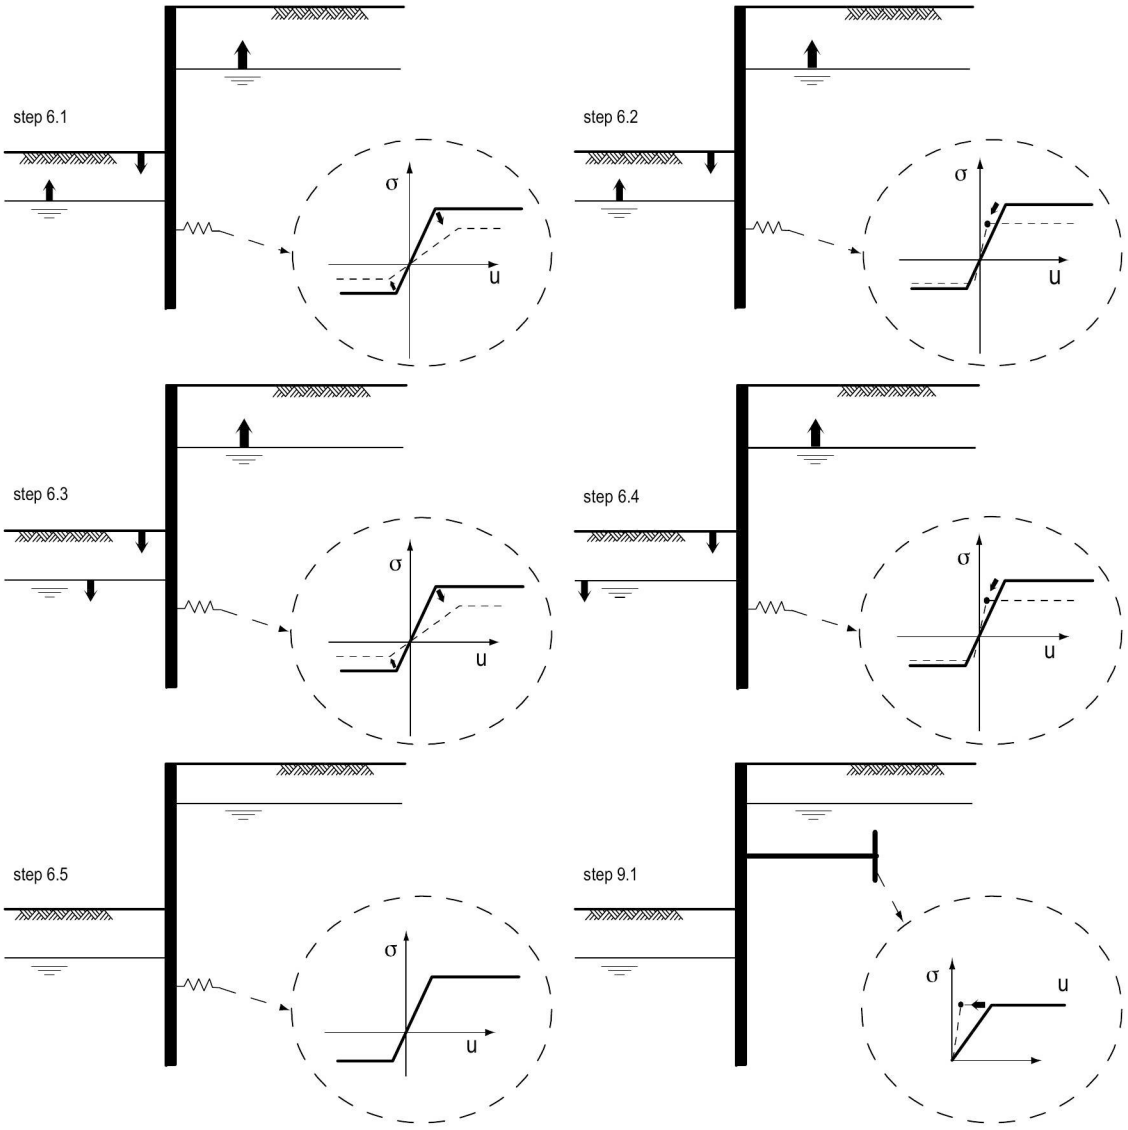

3 Input Data for all Stages

3.1 General Input Data

Verification according to National Annex of Eurocode 7 in the Netherlands (NEN 9997-1:2016)

Model	Sheet piling
Check vertical balance	Yes
Number of construction stages	3
Unit weight of water	9,81 kN/m³
Number of curves for spring characteristics	3
Unloading curve on spring characteristic	No
Elastic calculation	Yes

3.2 Sheet Piling Properties

Length	14,70 m
Level top side	1,20 m
Number of sections	1
q_b;max	1,00 MPa
Xi factor	1,39

3.2.1 General Properties

Section name	From [m]	To [m]	Material type	Acting width [m]
AZ 24 -700 (S2...	-13,50	1,20	Steel	1,00

3.2.2 Stiffness EI (elastic behaviour)

Section name	Elastic stiffness EI [kNm²/m']	Red. factor on EI [-]	Corrected elas. stiffness EI [kNm²]	Note to reduction factor
AZ 24 -700 (S2...	1,1722E+05	1,00	1,1722E+05	

3.2.3 Maximum Allowable Moments

Section name	Mr;char;el [kNm/m']	Modification factor [-]	Material factor [-]	Red. factor allow. moment [-]	Mr;d;el [kNm]
AZ 24 -700 (S2...	583,00	1,00	1,00	1,00	583,00

3.2.4 Properties for Vertical Balance

Section name	From [m]	To [m]	Height [mm]	Coating area [m²/m² wall]	Section area [cm²/m']
AZ 24 -700 (S2...	-13,50	1,20	459,00	1,38	174,00

3.3 Calculation Options

First stage represents initial situation	No
Calculation refinement	Coarse
Reduce delta(s) according to CUR	Yes
Verification	EC7 NA NL - method B: Partial factors (design values) in verified stage only. Eurocode 7 using the factors as described in the National Annex of the Netherlands. It is basically design approach III.
Verification of stage	1: Initieel
Used partial factor set	RC 1

Factors on loads - Geotechnical loads	
- Permanent load, unfavourable	1,000
- Permanent load, favourable	1,000
- Variable load, unfavourable	1,000
- Variable load, favourable	0,000
Factors on loads - Constructive loads	
- Permanent load, unfavourable	1,215
- Permanent load, favourable	0,900
- Variable load, unfavourable	1,350
- Variable load, favourable	0,000
Material factors	
- Cohesion	1,150
- Tangent phi	1,150
- Delta (wall friction angle)*	1,150
- Modulus of low representative subgrade reaction	1,300
Geometry modification	
- Increase retaining height	10,00 %
- Maximum increase retaining height	0,50 m
- Reduction in phreatic line on passive side **	0,20 m
- Raise in phreatic line on passive side **	0,20 m
- Raise in phreatic line on active side	0,05 m
Factors on representative values	
- Partial factor on M, D and Pmax	1,200
Overall stability factors	
- Cohesion	1,300
- Tangent phi	1,200
- Factor on unit weight soil	1,000
Vertical balance factors	
- Partial factor base resistance (gamma_b)	1,200
Verification of stage	2: Ophoging
Used partial factor set	RC 1
Factors on loads - Geotechnical loads	
- Permanent load, unfavourable	1,000
- Permanent load, favourable	1,000
- Variable load, unfavourable	1,000
- Variable load, favourable	0,000
Factors on loads - Constructive loads	
- Permanent load, unfavourable	1,215
- Permanent load, favourable	0,900
- Variable load, unfavourable	1,350
- Variable load, favourable	0,000
Material factors	
- Cohesion	1,150
- Tangent phi	1,150
- Delta (wall friction angle)*	1,150
- Modulus of low representative subgrade reaction	1,300
Geometry modification	
- Increase retaining height	10,00 %
- Maximum increase retaining height	0,50 m
- Reduction in phreatic line on passive side **	0,20 m
- Raise in phreatic line on passive side **	0,20 m
- Raise in phreatic line on active side	0,05 m
Factors on representative values	
- Partial factor on M, D and Pmax	1,200

Overall stability factors	
- Cohesion	1,300
- Tangent phi	1,200
- Factor on unit weight soil	1,000
Vertical balance factors	
- Partial factor base resistance (gamma_b)	1,200
Verification of stage	3: Stempelkracht
Used partial factor set	RC 1
Factors on loads - Geotechnical loads	
- Permanent load, unfavourable	1,000
- Permanent load, favourable	1,000
- Variable load, unfavourable	1,000
- Variable load, favourable	0,000
Factors on loads - Constructive loads	
- Permanent load, unfavourable	1,215
- Permanent load, favourable	0,900
- Variable load, unfavourable	1,350
- Variable load, favourable	0,000
Material factors	
- Cohesion	1,150
- Tangent phi	1,150
- Delta (wall friction angle)*	1,150
- Modulus of low representative subgrade reaction	1,300
Geometry modification	
- Increase retaining height	10,00 %
- Maximum increase retaining height	0,50 m
- Reduction in phreatic line on passive side **	0,20 m
- Raise in phreatic line on passive side **	0,20 m
- Raise in phreatic line on active side	0,05 m
Factors on representative values	
- Partial factor on M, D and Pmax	1,200
Overall stability factors	
- Cohesion	1,300
- Tangent phi	1,200
- Factor on unit weight soil	1,000
Vertical balance factors	
- Partial factor base resistance (gamma_b)	1,200

* For delta (wall friction angle), the input value of tangent phi is used
** This modification of the phreatic level does not apply when the sheet piling is completely submerged.

End of Report