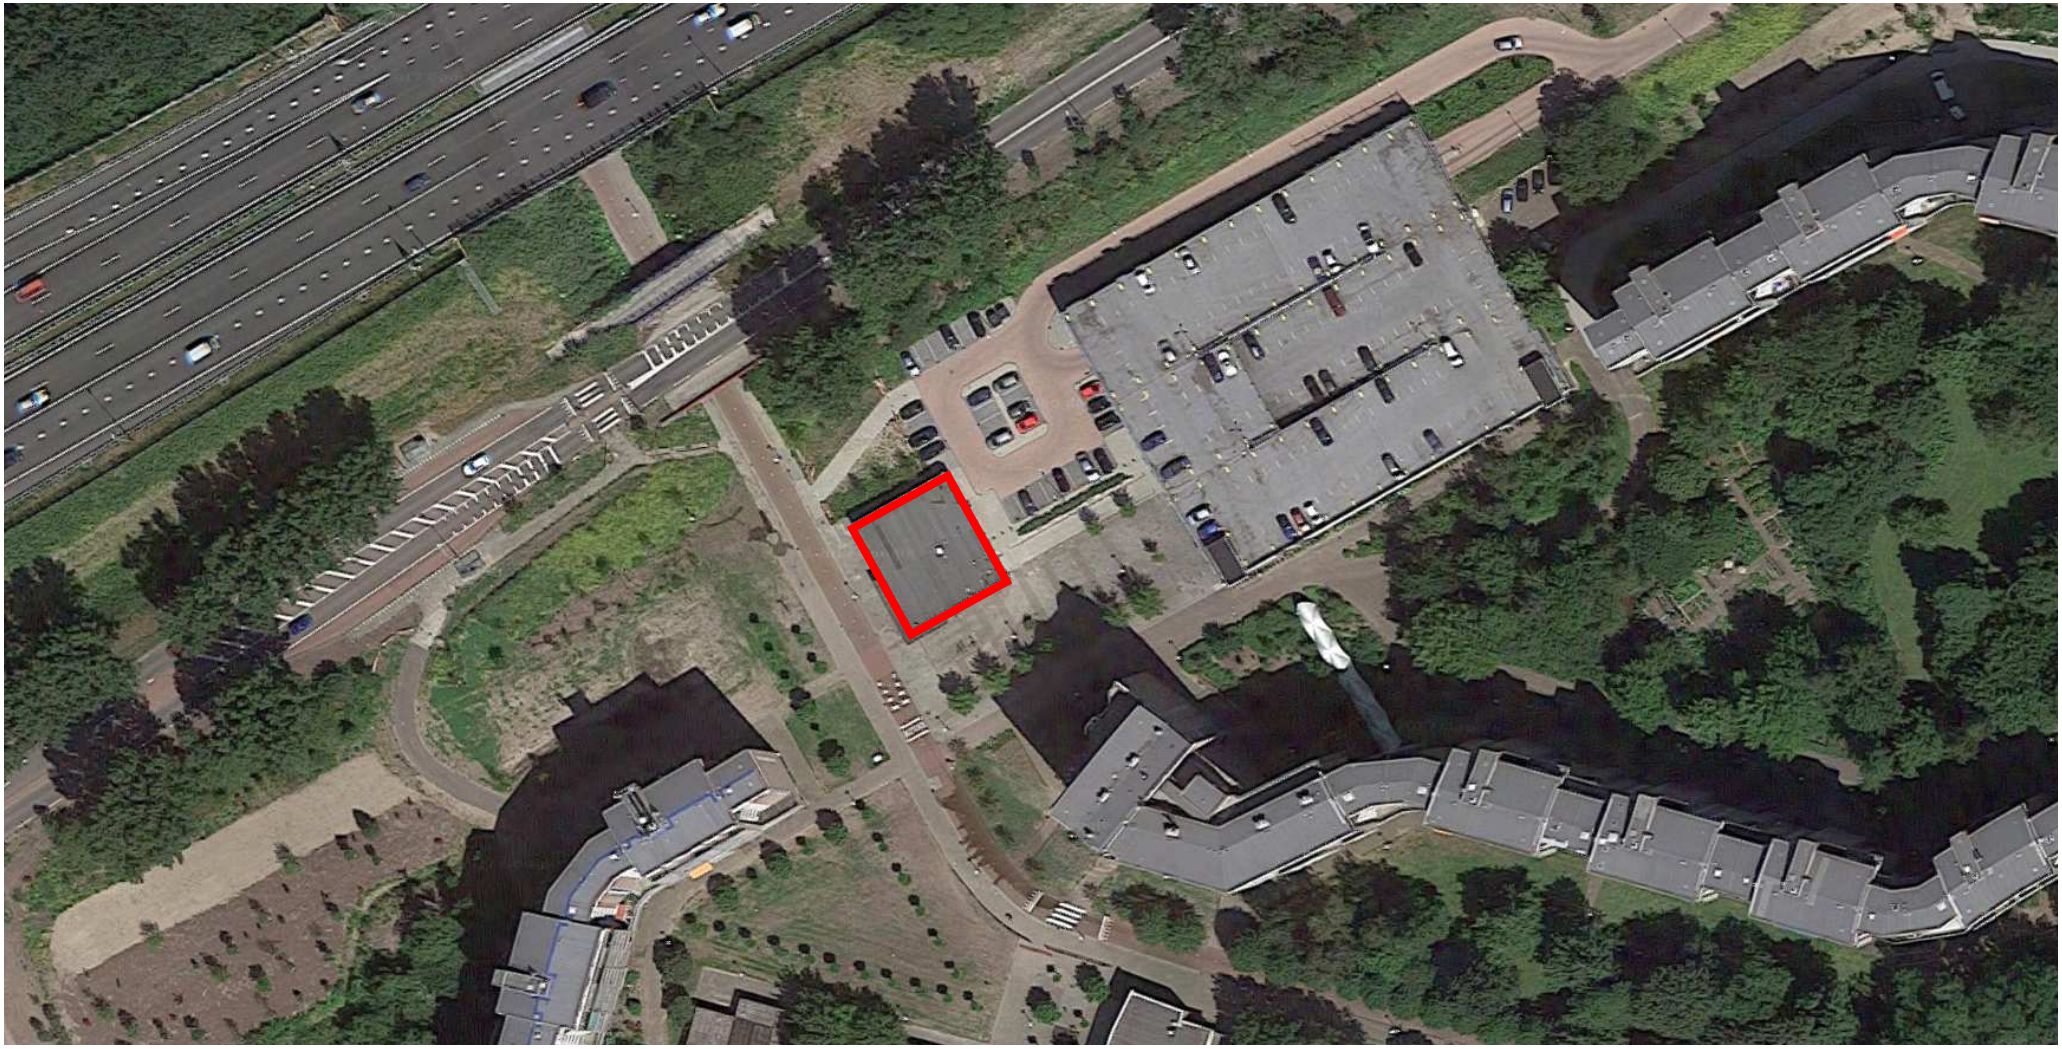

Mulders
vandenBerk
Architecten

architecten bv bna

RESURRECTION KERK, AMSTERDAM - ZUIDOOST

Prelimenary design

170713



THE PROGRAMME

No	Omschrijving	Eenheid	Eenheden	Norm	Subtotaal	Totaal
	Verdieping					**448,8**
1	Kerkzaal	pers	215	1,2	258	
	Opslag inventaris kerkzaal				25	
2	Podium (koor.muziek)	ruimte	1	30,0	30	
3	Voorruimte kerkzaal	pers	40	0,8	32	
4	Kantoor pastor	ruimte	1	10,0	10	
5	Kantoor secretaris	ruimte	1	10,0	10	
6	Administratie/ Kerkorganisatie	Werkpl	2	8,0	16	
8	Techniek / constructies				67,8	
	Begane grond					**356**
9	Jeugd groepen	pers	60	2,0	120	
10	Keuken	ruimte	1	30,0	30	
11	Opslag keuken	ruimte	1	10,0	10	
12	Algemene berging	ruimte	1	10,0	10	
13	Toiletten	ruimte	10	2,0	20	
14	Mindervaliden toilet /baby verschoon ruimte	ruimte	1	6,0	6	
15	Ontmoetingshal	pers	100	1,0	100	
	Inclusiief garderobe					
16	Tocht portaal	ruimte	1	10,0	10	
17	Techniek / constructies				50	
	TOTAAL					**804,8**

GROUND FLOOR 356 m2

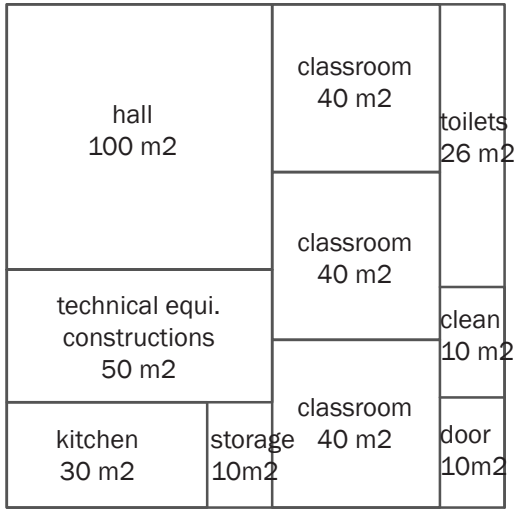

SECOND FLOOR 448,8 m2

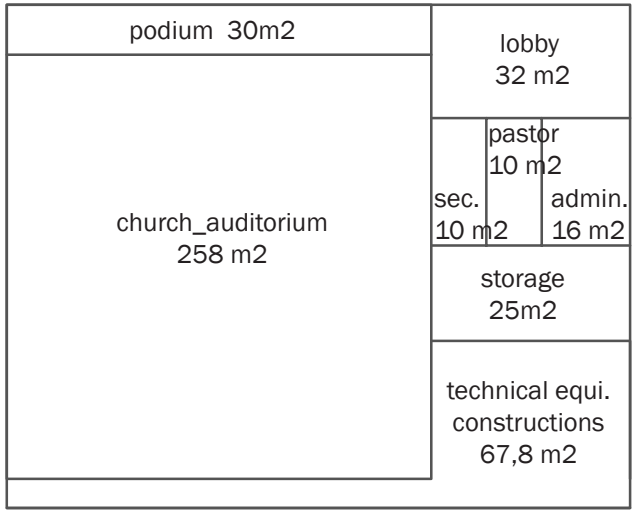

MAXIMUM SURFACE OF THE BUILDING
670 M2

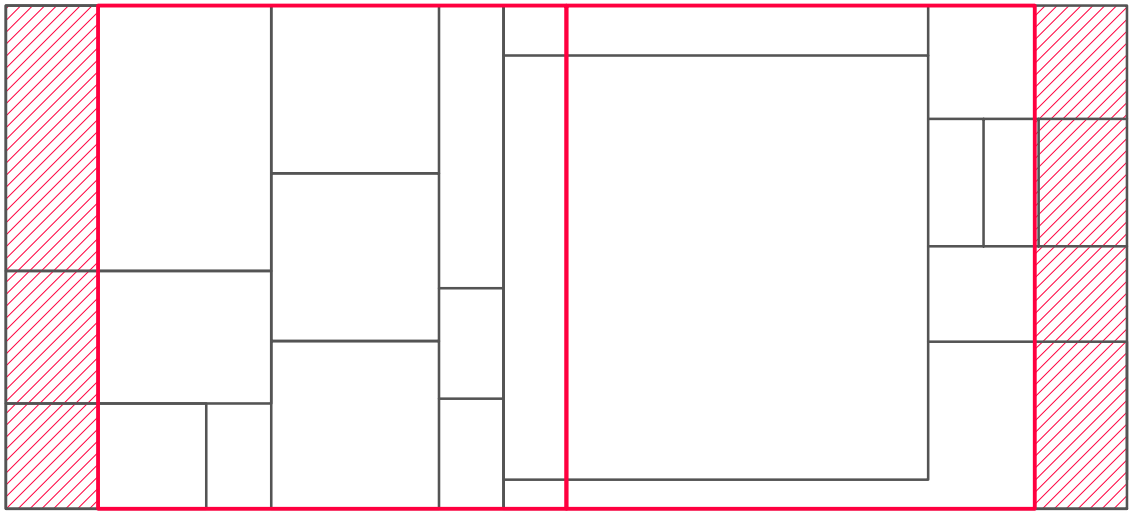

THE SURFACE O THE PROGRAMME
804,8

The surface of the programme is 134,8 m2 bigger than the permissible surface of the building.

No	Omschrijving	Eenheid	Eenheden	Norm	Subtotaal	Totaal	Reality	
	ground floor					**396**	**355**	
1	classrooms	pers	80	2.0	160		152	53 / 51 / 48
2	Kitchen	ruimte	1	30.0	30		34	
3	Kitchen storage	ruimte	1	10.0	10		6.7	
4	general storage	ruimte	1	10.0	10			
5	toilets	ruimte	10	2.0	20		20	
6	MIVA	ruimte	1	6.0	6		3.7	
7	meeting hall	pers	100	1.0	100		62	plus 2 rooms by 51 and 48 = 161 m2
	Inclusiief garderobe							
8	Tocht portaal	ruimte	1	10.0	10		13	
9	technical / constructions				50		63.6	
	second floor - church hall					**448.8**	**355**	
10	church hall	pers	215	1.2	258		206	
12	storage				25		22	
13	Podium	ruimte	1	30.0	30		19	
14	lobby	pers	40	0.8	32		28	
15	toilets						16	
16	technical / constructions				67.8		64	
	inserted third floor					**/**	**68.3**	
17	secretary office	ruimte	1	10.0	10		8	
18	administration office	Werkpl	2	8.0	16		11	
19	pastor's office	ruimte	1	10.0	10		18	
20	light / sound						12.3	
21	instalation room				67.8		19	
	TOTAAL					**844.8**	**778.3**	

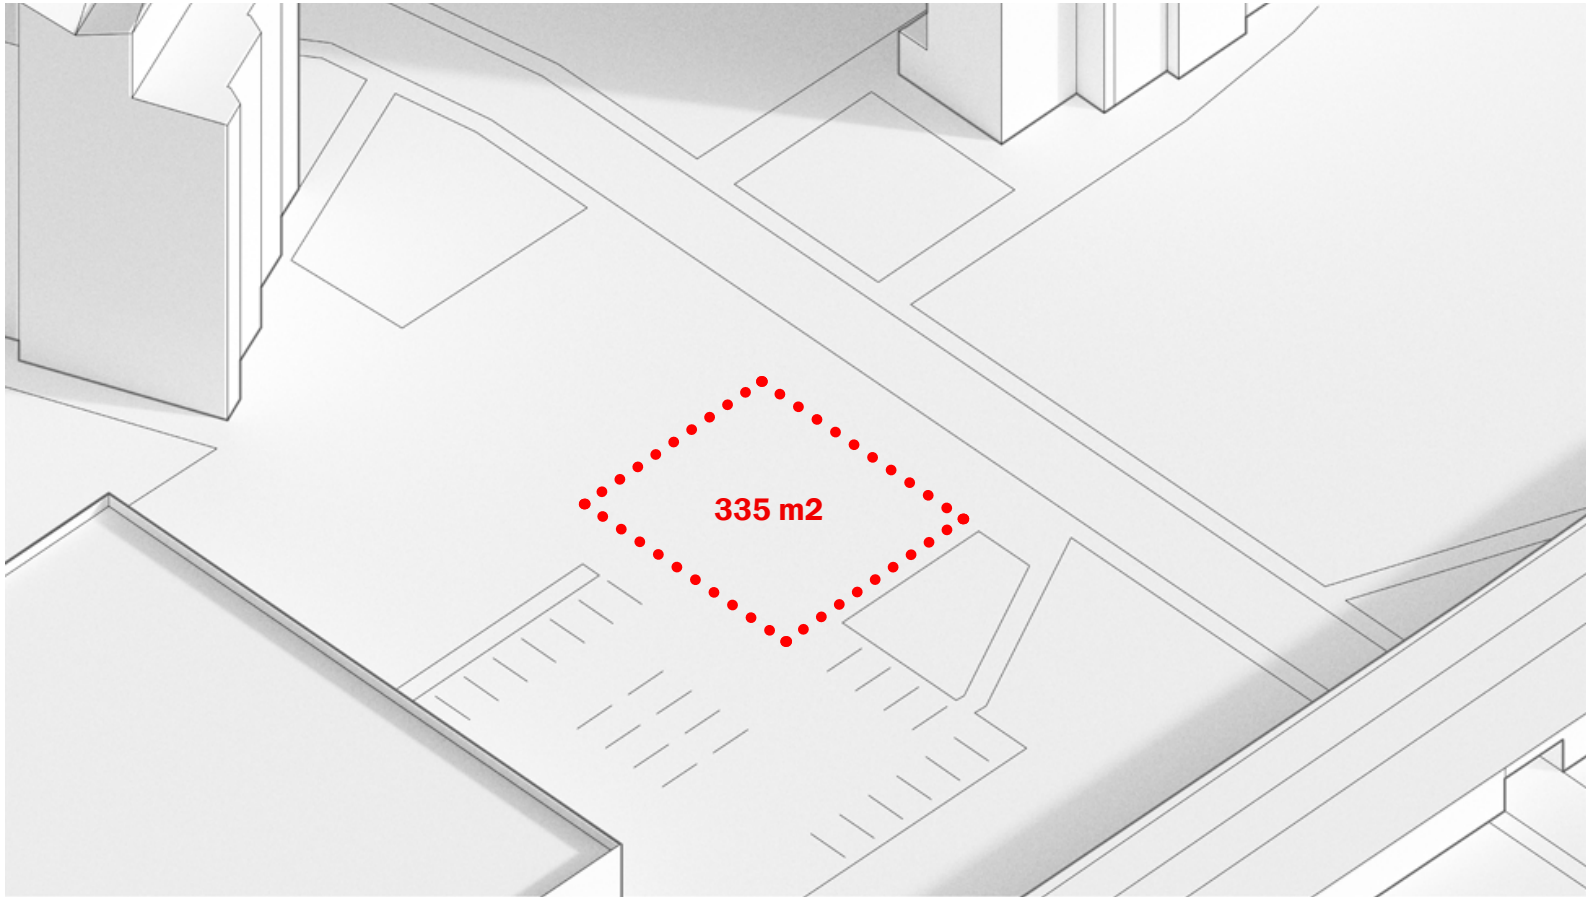
335 m2

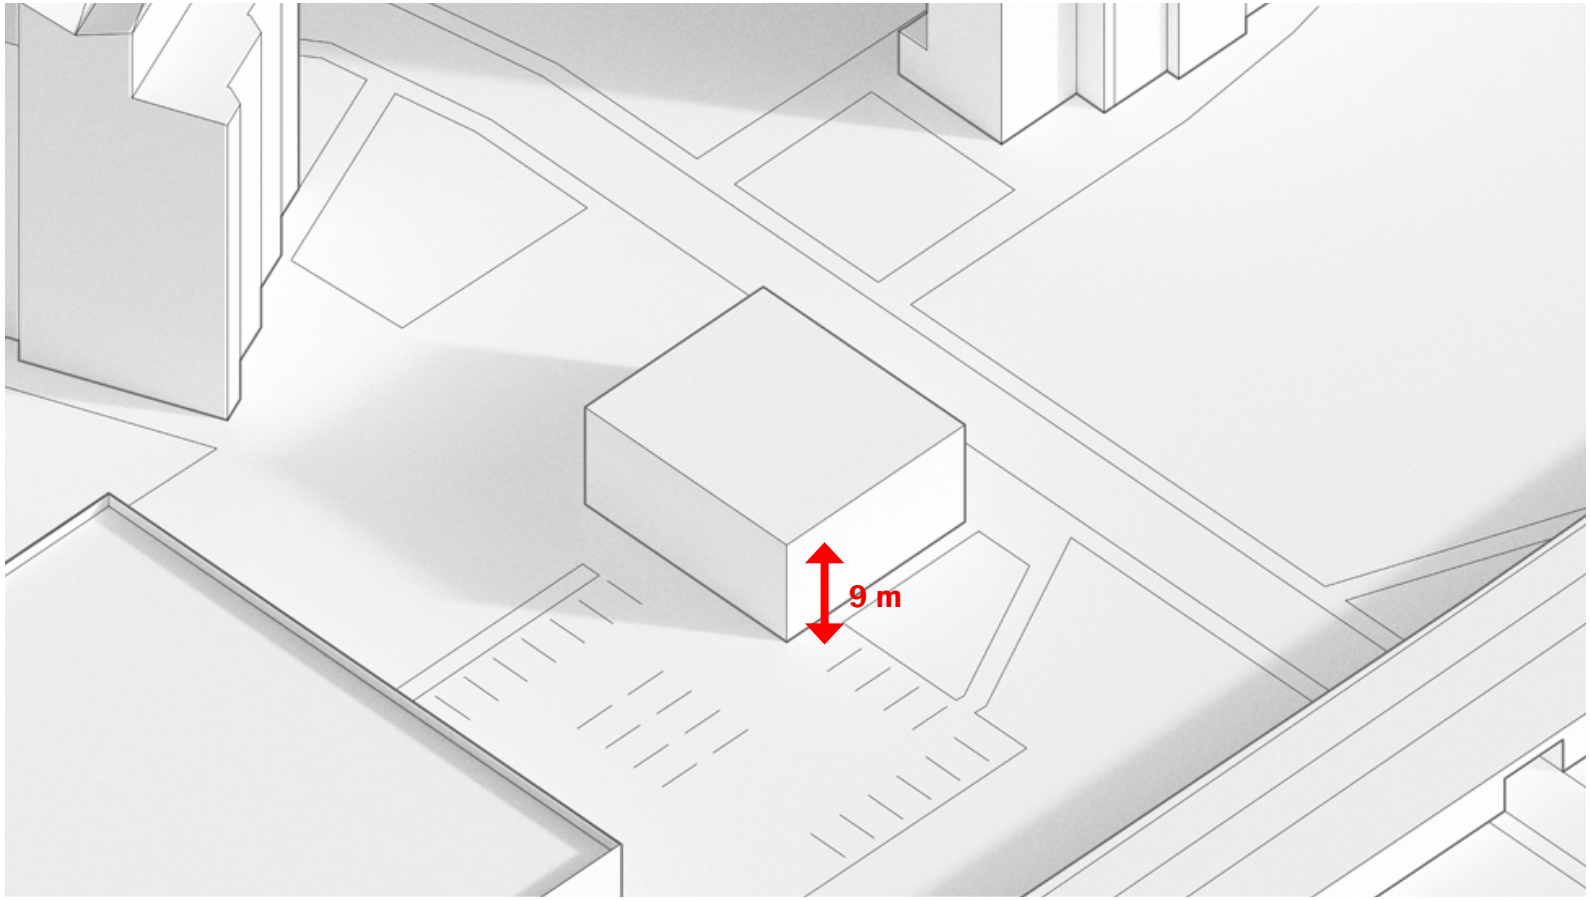
9 m

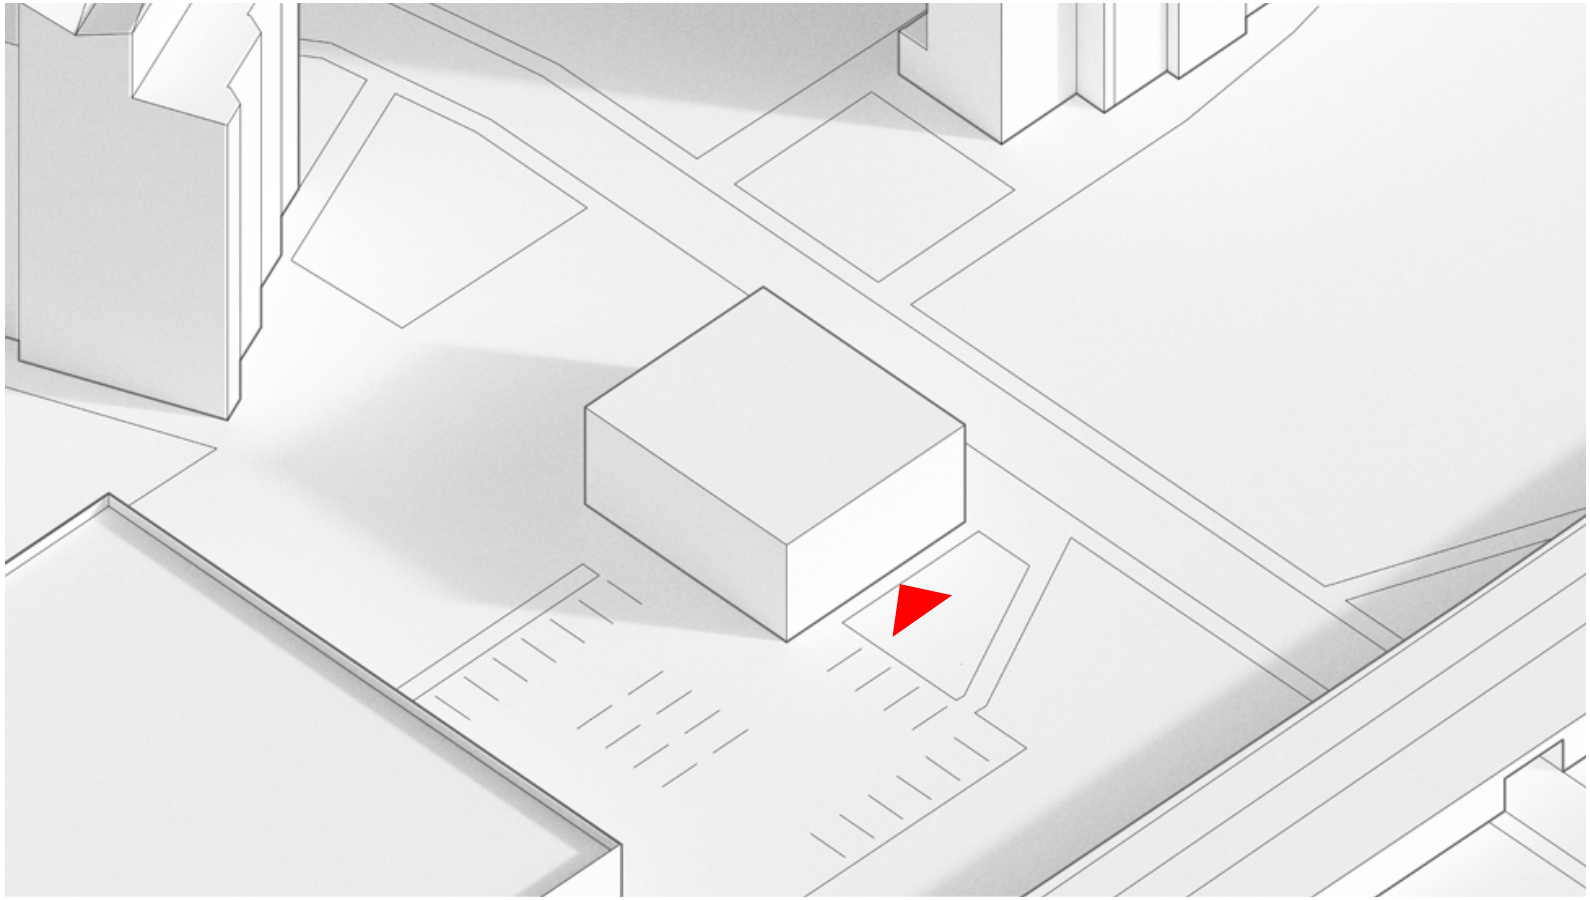

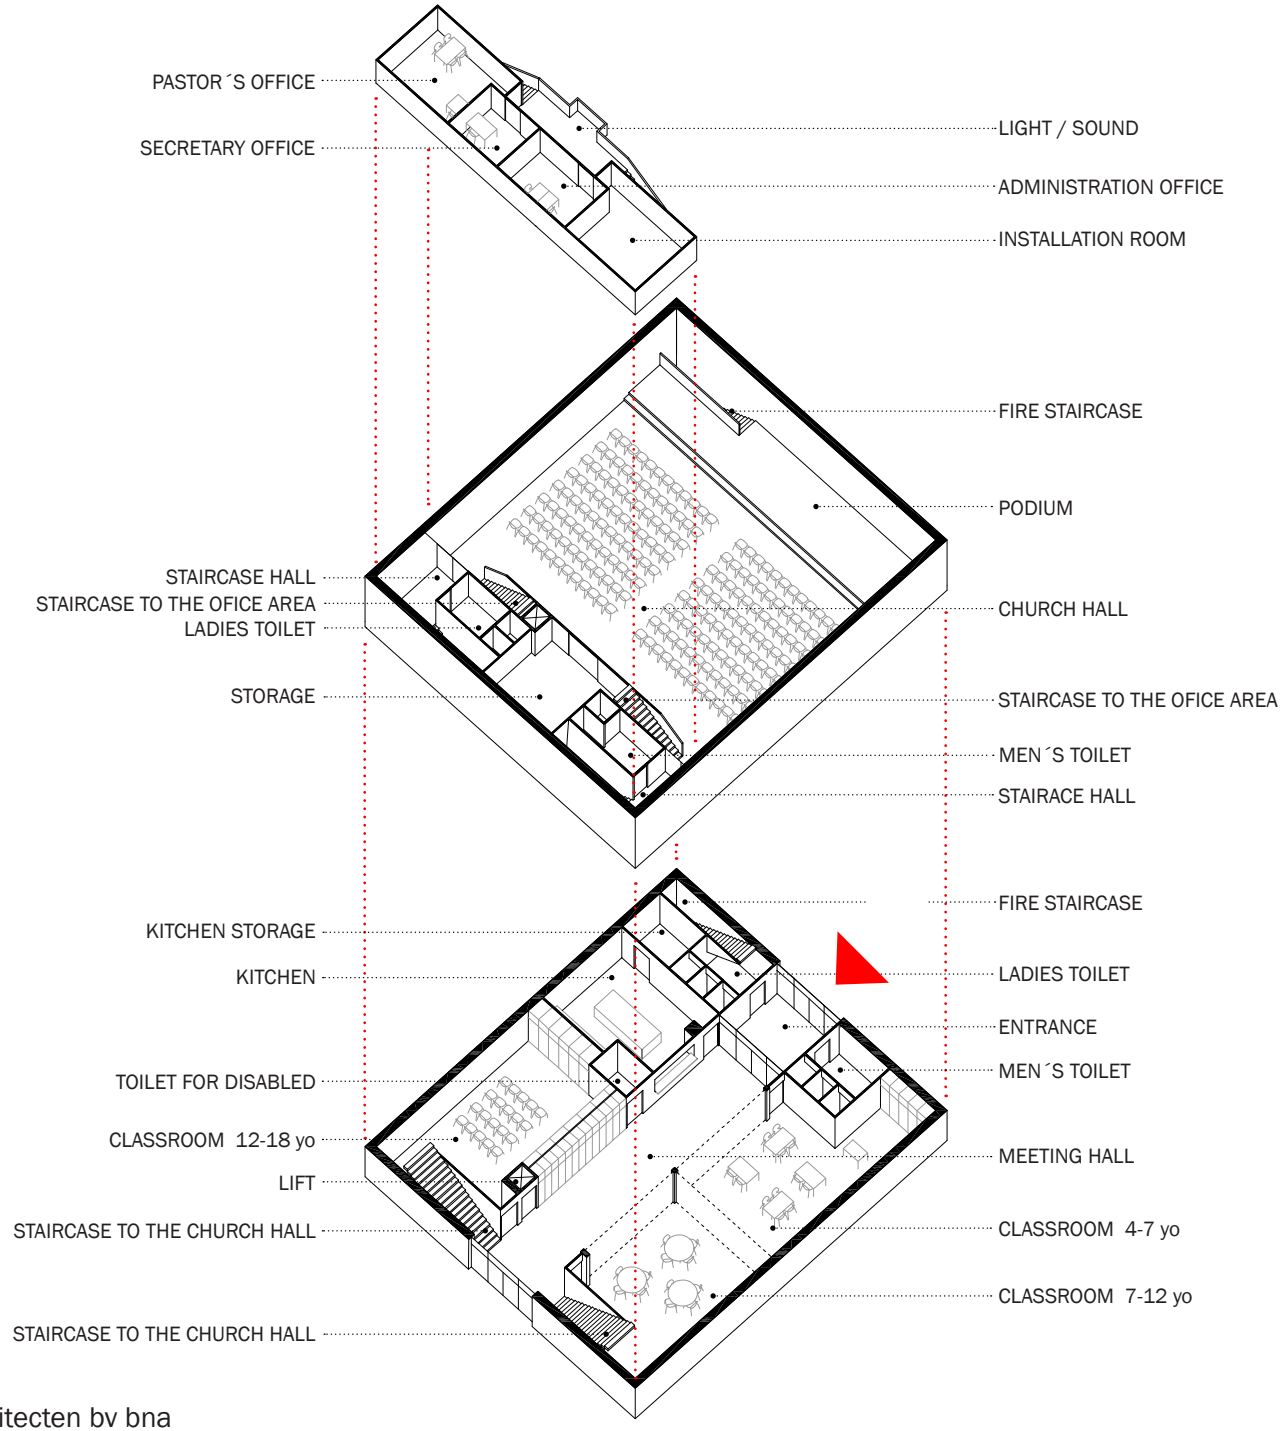

MuldersvandenBerk Architecten bv bna

FUNCTIONAL SCHEMA

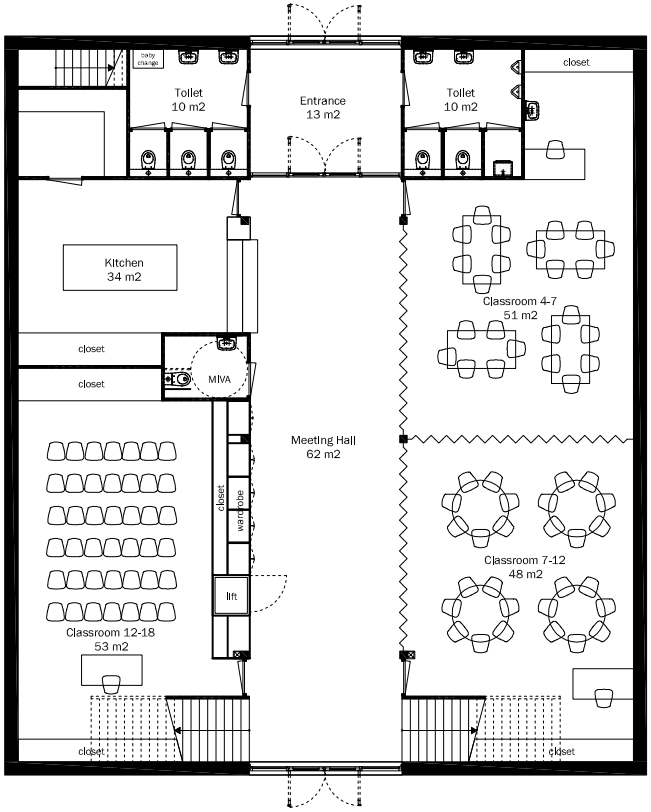

MuldersvandenBerk Architecten bv bna

GROUND FLOOR - COMMUNITY

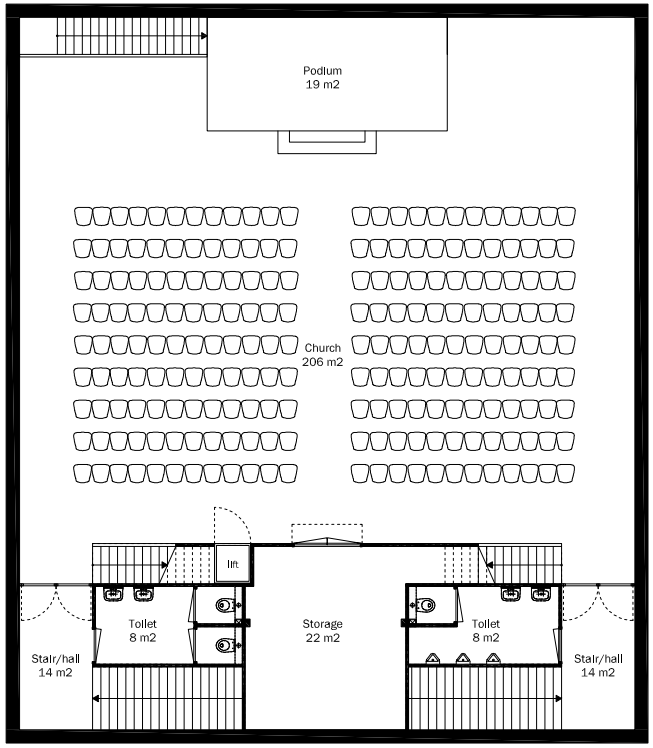

MuldersvandenBerk Architecten bv bna

SECOND FLOOR - CHURCH HALL

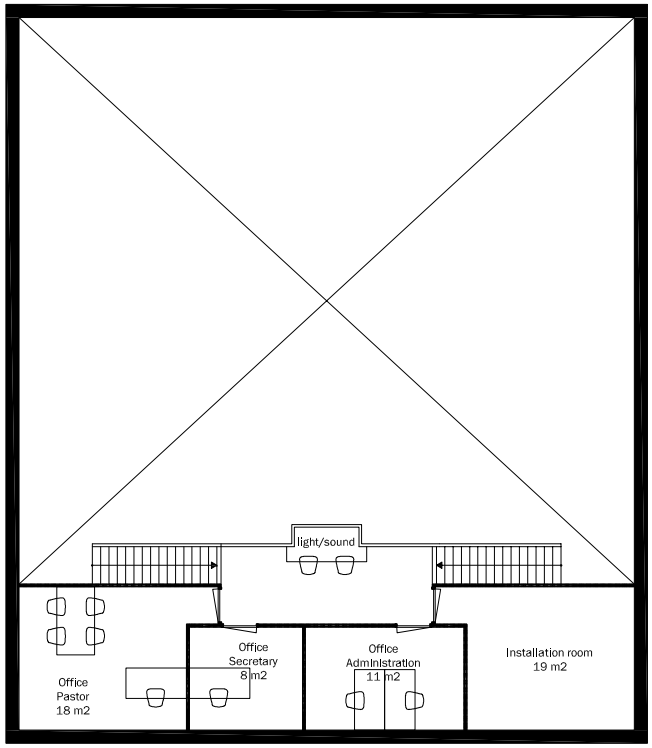

THIRD INSERTED FLOOR

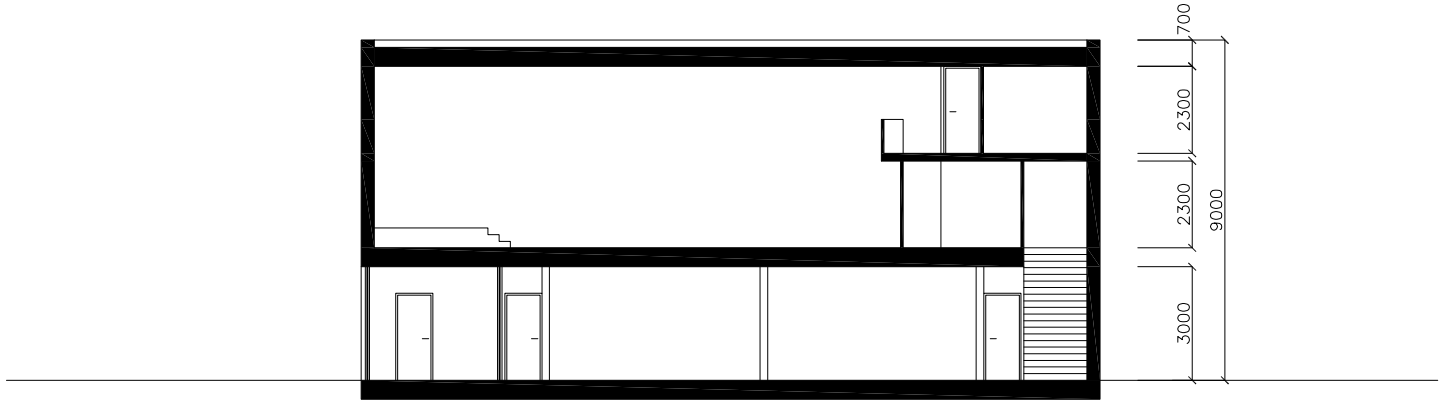
700
2300
2300
9000
3000

